



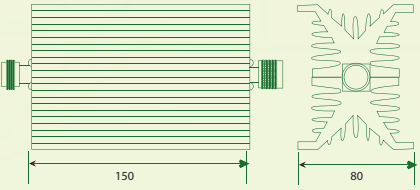


1-2 Watt			
	Tolerance	0.5dB	
	Attenuation	1-30dB	
	Weight	50g	
	Connector-Input	N Female	
	Connector-Output	N Male	
		Part Number	LTRF-A(1-30)-1/2-W
10 Watt			
	Tolerance	1.0dB	
	Attenuation	1-30dB	
	Weight	100g	
	Connector-Input	N Female	
	Connector-Output	N Male	
		Part Number	LTRF-A(1-30)-10-W
20 Watt			
	Tolerance	1.0dB	
	Attenuation	1-30dB	
	Weight	339g	
	Connector-Input	N Female	
	Connector-Output	N Male	
		Part Number	LTRF-A(1-30)-20-W
50 Watt			
	Tolerance	0.8dB	
	Attenuation	1-30dB	
	Weight	339	
	Connector-Input	N Female	
	Connector-Output	N Male	
		Part Number	LTRF-A(1-30)-50-W
100 Watt			
	Tolerance	1dB	
	Attenuation	5-60dB	
	Weight	1700g	
	Connector-Input	N Female	
	Connector-Output	N Male	
		Part Number	LTRF-A(1-30)-100-W
*Other connectors like SMA & 7/16 also available.			

General Specification		Plating		Material	
Operating Frequency	DC~3000MHZ	Inner Conductor	Silver Plated	Inner Conductor	Beryllium Copper or Spring Bronze
VSWR	1:1.3/MAX	Outer Conductor	Nickel Plated	Other Metal Part (Housing)	Aluminium
Impedance	50 Ω /Nominal	Other Metal Part	Black/- Plated		
Operating Temperature	-40°C ~ +80°C				