




Fiber Management Systems - FR-TNBX

TNBX Fiber Rack Mount Distribution Panel (Pull Out)

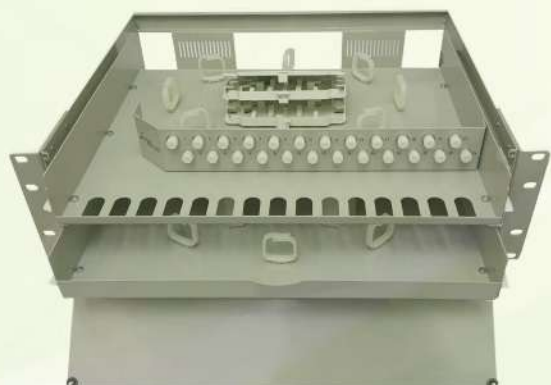

FR-TNB is designed for fiber termination in TNB SSU, PPU and PMU. Besides, it is also suitable to use in telecommunication exchanges, power plants and other communication rooms. FR-TNB is widely used in high density fiber works.

FR-TNBX is enhanced with more rooms for fiber termination work as well as better cable management. The new designed swing down front cover is removable when necessary.

Both cable storage and splicing compartment are able to slide out for easy access during maintenance. This fiber management unit normally loaded with FC, SC and E2000/APC adapters. Other preferred fiber adapters are available too.

Features

- Front access panel designed for easy patching
- Flip through splice tray provides easy access for maintenance
- Dual layer for proper fiber splicing and patch cord management
- Top cover makes fiber expansion work convenience and less time consuming
- Slide Out design for easy access during maintenance
- Removable swing door front cover
- Interchangeable side bracket allows 19", 21" and 23" mounting
- Standard FC, SC and E2000/APC adapter or others

Specifications

Dimesion	W : 490mm x H : 133.35mm x D : 400mm
Material	Mild Steel
Finishing	Epoxy powder coating
Colour	Grey or Beige

Ordering Information

Part Number	Description
TTFO-FR-TNBX-24	TNBX Fiber Rack Mount Distribution Panel 24 Port
TTFO-FR-TNBX-36	TNBX Fiber Rack Mount Distribution Panel 36 Port
TTFO-FR-TNBX-48	TNBX Fiber Rack Mount Distribution Panel 48 Port